


## Alarms with emergency lighting for lifts, AKO-5404 series




**These units comply with EN 81-1.**

- Own autonomy of over one hour with automatic Ni-Cd battery recharging.
- Output for rescue lighting 6V, 500 mA.
- Output for permanent supply 6V, 40 mA.
- Noise level over 90 decibels at 1 m.
- Dimensions 212 x 139 x 52 mm.
- The units with auxiliary relay allow alarms to be activated remotely in the AKO-5605A centralizer.

**AKO-5404C**  
Installed in cabin

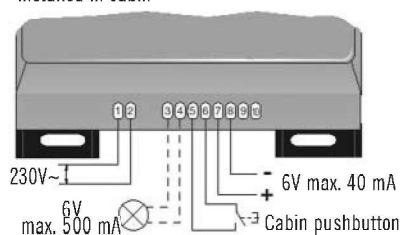

**AKO-54041A** 230V or **AKO-54043** 120V  
Installed in cabin

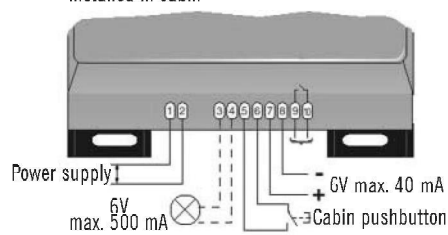

Reference	Description	Family	Pack
<b>AKO-5404C</b>	Power supply unit 230V without relay output	4400	12 Units
<b>AKO-54041A</b>	Power supply unit 230V with relay output	4400	12 Units
<b>AKO-54043</b>	Power supply unit 120V with relay output	4400	12 Units

## Alarms with emergency lighting for lifts, loudspeaker or siren type



**AKO-5405A**



**AKO-5409A**

**These units comply with EN 81-1.**

- Own autonomy of over one hour with automatic battery recharging.
- Output for rescue lighting 6V, 500 mA.
- Output for permanent supply 6V, 40 mA.
- Noise level over 90 decibels at 1 m.
- Dimensions 268 x 160 x 116 mm.
- With an auxiliary relay allowing alarms to be activated remotely in the AKO-5605A centralizer

Reference	Description	Family	Pack
<b>AKO-5405A</b>	Unit 230V, output 6V, alarm with loudspeaker	4400	12 Units
<b>AKO-5409A</b>	Unit 230V, output 12V, alarm with siren	4400	8 Units