


# CONTA-CON



## P.C. board plug-in connectors

Header




### Drawings

#### STL 130/... /5,00-V vertical

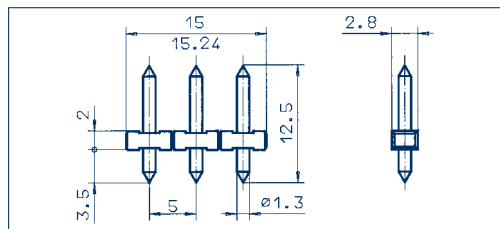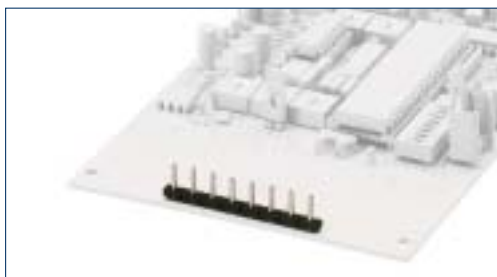

#### STL 132/... /5,00-V vertical

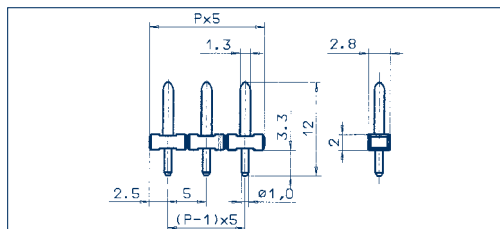

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,50

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T55)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials


Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	CuZn
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	black (Ral 9011)	
2	11435.4	50
3	11436.4	50
4	11437.4	50
5	11438.4	50
6	11439.4	50
7	11440.4	50
8	11441.4	50
9	11442.4	50
10	11443.4	50
11	11444.4	50
12	11445.4	50
13	11446.4	50
14	11447.4	50
15	11448.4	50
16	11449.4	50
17	11450.4	50
18	11451.4	50
19	11452.4	50
20	11453.4	50
21	11454.4	50
22	11455.4	50
23	11456.4	50
24	11457.4	50


## P.C. board plug-in connectors

Header




### Drawings

#### STL 140/... /5,00-H horizontal

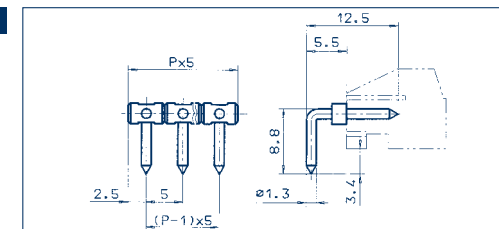

#### STL 130/... /5,08-V vertical

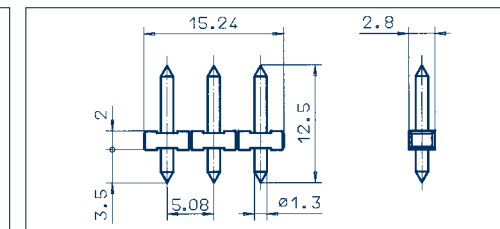

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,50

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T55)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	CuZn
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	black (Ral 9011)	
2	11492.4	50
3	11493.4	50
4	11494.4	50
5	11495.4	50
6	11496.4	50
7	11497.4	50
8	11498.4	50
9	11499.4	50
10	11500.4	50
11	11501.4	50
12	11502.4	50
13	11503.4	50
14	11504.4	50
15	11505.4	50
16	11506.4	50
17	11507.4	50
18	11508.4	50
19	11509.4	50
20	11510.4	50
21	11511.4	50
22	11512.4	50
23	11513.4	50
24	11514.4	50

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	black (Ral 9011)	
2	13650.4	50
3	13651.4	50
4	13652.4	50
5	13653.4	50
6	13654.4	50
7	13655.4	50
8	13656.4	50
9	13657.4	50
10	13658.4	50
11	13659.4	50
12	13660.4	50
13	13661.4	50
14	13662.4	50
15	13663.4	50
16	13664.4	50
17	13665.4	50
18	13666.4	50
19	13667.4	50
20	13668.4	50
21	13669.4	50
22	13670.4	50
23	13671.4	50
24	13672.4	50

P.C. board plug-in connectors

Header



STL 140/... /5,08-H horizontal

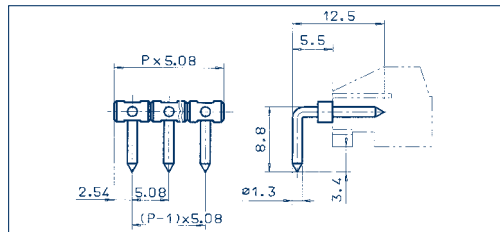

Drawings

Connection principle

Dimensions

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,50

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T55)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials


Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	CuZn
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information


No. of poles	Cat.-No.	Qty.p.pck.
	● black (Ral 9011)	
2	13673.4	50
3	13674.4	50
4	13675.4	50
5	13676.4	50
6	13677.4	50
7	13678.4	50
8	13679.4	50
9	13680.4	50
10	13681.4	50
11	13682.4	50
12	13683.4	50
13	13684.4	50
14	13685.4	50
15	13686.4	50
16	13687.4	50
17	13688.4	50
18	13689.4	50
19	13690.4	50
20	13691.4	50
21	13692.4	50
22	13693.4	50
23	13694.4	50
24	13695.4	50

P.C. board plug-in connectors

Header



STL 130/... /10,00-V vertical

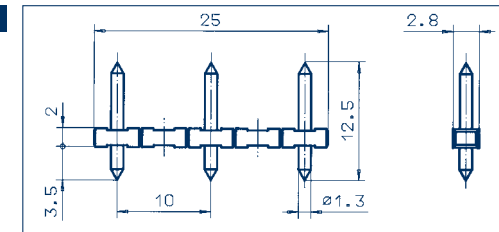

Drawings

Connection principle

Dimensions

Spacing mm	10,00
Stripped length mm	-
PCB hole diameter mm	1,50

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	630 V
Rated current A	10 A	10 A (T55)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	8,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3


Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	CuZn
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information

No. of poles	Cat.-No.	Qty.p.pck.
	● black (Ral 9011)	
2	11458.4	50
3	11459.4	50
4	11460.4	50
5	11461.4	50
6	11462.4	50
7	11463.4	50
8	11464.4	50
9	11465.4	50
10	11466.4	50
11	11467.4	50
12	11468.4	50

STL 130/... /10,16-V vertical

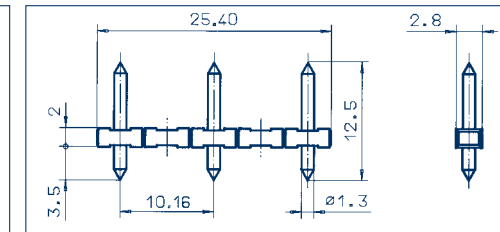

Drawings

Connection principle

Dimensions

Spacing mm	10,16
Stripped length mm	-
PCB hole diameter mm	1,50

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	630 V
Rated current A	10 A	10 A (T55)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	8,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	CuZn
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-


Order information

No. of poles	Cat.-No.	Qty.p.pck.
	● black (Ral 9011)	
2	13696.4	50
3	13697.4	50
4	13698.4	50
5	13699.4	50
6	13700.4	50
7	13701.4	50
8	13702.4	50
9	13703.4	50
10	13704.4	50
11	13705.4	50
12	13706.4	50

# CONTA-CON



## P.C. board plug-in connectors

Header




3,50 mm

### STL 1550/... /3,50-V-G vertical

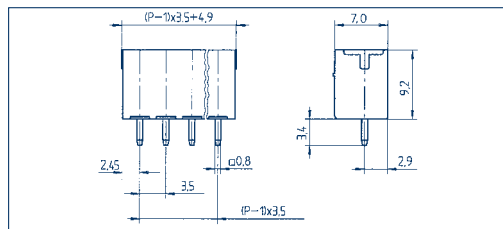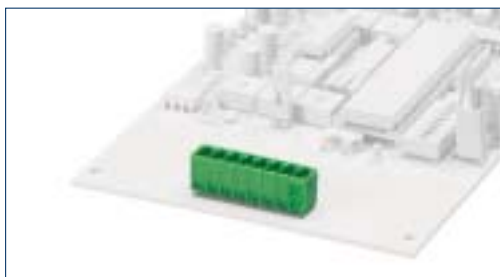

### STL 1550/... /3,50-H-G horizontal

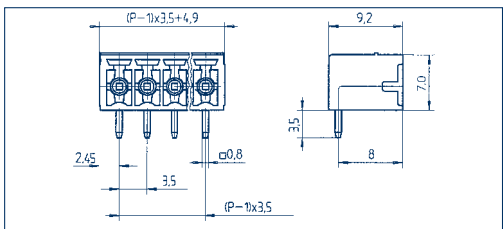

## Drawings

### Connection principle

#### Dimensions

Spacing mm	3,50
Stripped length mm	-
PCB hole diameter mm	1,20

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11877.1	50
3	11878.1	50
4	11879.1	50
5	11880.1	50
6	11881.1	50
7	11882.1	50
8	11883.1	50
9	11884.1	50
10	11885.1	50
11	11886.1	50
12	11887.1	50
13	11888.1	50
14	11889.1	50
15	11890.1	50
16	11891.1	50
17	11892.1	50
18	11893.1	50
19	11894.1	50
20	11895.1	50

## Accessories

Coding Page 122 - 123



## P.C. board plug-in connectors

Header




3,50 mm

### STL 1550/... /3,50-V-F vertical

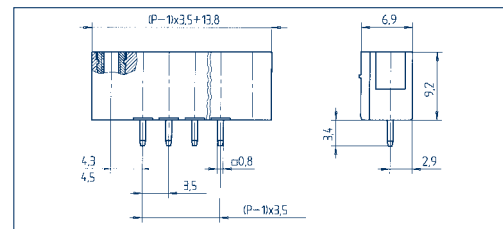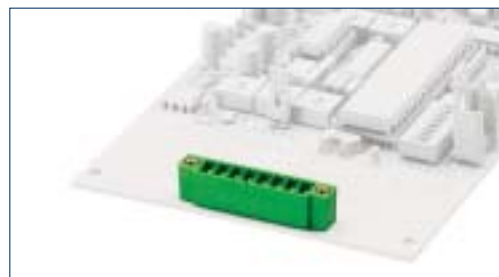

### STL 1550/... /3,50-H-F horizontal

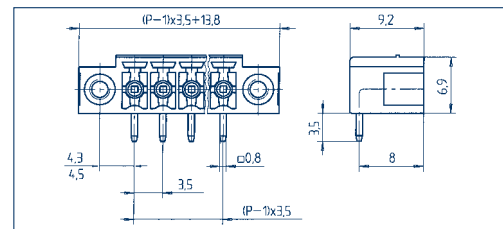

## Drawings

### Connection principle

#### Dimensions

Spacing mm	3,50
Stripped length mm	-
PCB hole diameter mm	1,20

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	13753.1	50
3	13754.1	50
4	13755.1	50
5	13756.1	50
6	13757.1	50
7	13758.1	50
8	13759.1	50
9	13760.1	50
10	13761.1	50
11	13762.1	50
12	13763.1	50
13	13764.1	50
14	13765.1	50
15	13766.1	50
16	13767.1	50
17	13768.1	50
18	13769.1	50


## Accessories

Coding Page 122 - 123

# CONTA-CON



## P.C. board plug-in connectors

Header




3,81 mm

### STL 1550/... /3,81-V-G vertical

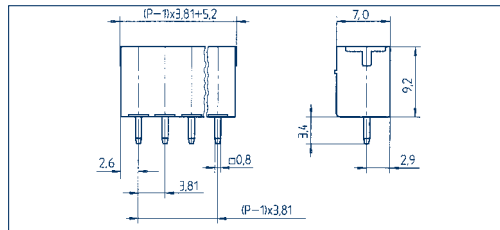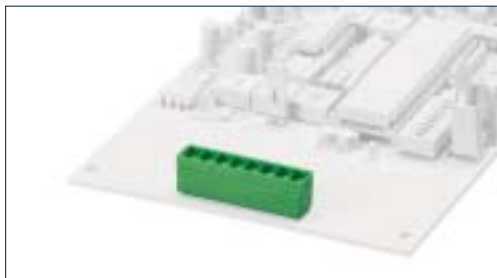

### STL 1550/... /3,81-H-G horizontal

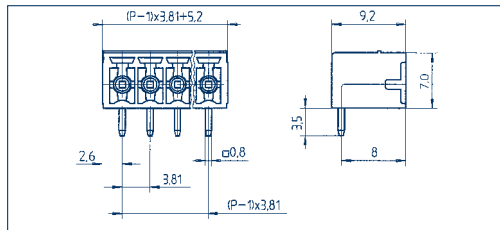

## Drawings

### Connection principle

#### Dimensions

Spacing mm	3,81
Stripped length mm	-
PCB hole diameter mm	1,20

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11896.1	50
3	11897.1	50
4	11898.1	50
5	11899.1	50
6	11900.1	50
7	11901.1	50
8	11902.1	50
9	11903.1	50
10	11904.1	50
11	11905.1	50
12	11906.1	50
13	11907.1	50
14	11908.1	50
15	11909.1	50
16	11910.1	50
17	13709.1	50
18	13710.1	50
19	13711.1	50
20	13712.1	50

## Accessories

Coding Page 122 - 123


## P.C. board plug-in connectors

Header




3,81 mm

### STL 1550/... /3,81-V-F vertical

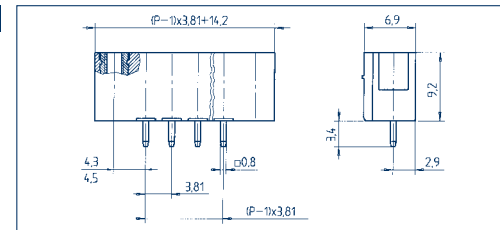

### STL 1550/... /3,81-H-F horizontal

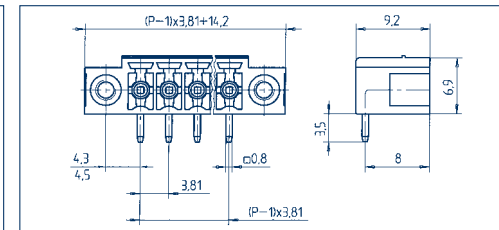

## Drawings

### Connection principle

#### Dimensions

Spacing mm	3,81
Stripped length mm	-
PCB hole diameter mm	1,20

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	13787.1	50
3	13788.1	50
4	13789.1	50
5	13790.1	50
6	13791.1	50
7	13792.1	50
8	13793.1	50
9	13794.1	50
10	13795.1	50
11	13796.1	50
12	13797.1	50
13	13798.1	50
14	13799.1	50
15	13800.1	50
16	13801.1	50
17	13802.1	50
18	13803.1	50
19	13804.1	50
20	13805.1	50

## Accessories

Coding Page 122 - 123


P.C. board plug-in connectors

Header



3,81 mm

STL 1590/... /3,81-G

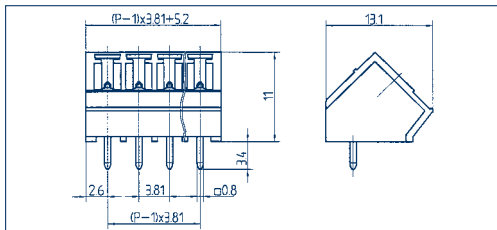

Drawings

Connection principle

Dimensions

Spacing mm	3,81
Stripped length mm	-
PCB hole diameter mm	1,20

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information

No. of poles	Cat.-No.	Qty.p.pck.
	● green	
	(Ral 6018)	


2	11983.1	50
3	11984.1	50
4	11985.1	50
5	11986.1	50
6	11987.1	50
7	11988.1	50
8	11989.1	50
9	11990.1	50
10	11991.1	50
11	11992.1	50
12	11993.1	50
13	11994.1	50
14	11995.1	50
15	11996.1	50
16	11997.1	50
17	11998.1	50
18	11999.1	50
19	12000.1	50
20	12001.1	50

Accessories

Coding Page 122 - 123


P.C. board plug-in connectors

Header



3,81 mm

STL 1570/... /3,81-V-G vertical

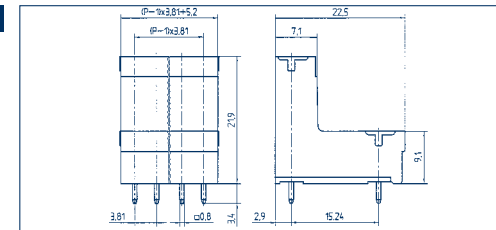

Drawings

Connection principle

Dimensions

Spacing mm	3,81
Stripped length mm	-
PCB hole diameter mm	1,20

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information



No. of poles	Cat.-No.	Qty.p.pck.
	● green	
	(Ral 6018)	

2	11945.1	50
3	11946.1	50
4	11947.1	50
5	11948.1	50
6	11949.1	50
7	11950.1	50
8	11951.1	50
9	11952.1	50
10	11953.1	50
11	11954.1	50
12	11955.1	50
13	11956.1	50
14	11957.1	50
15	11958.1	50
16	11959.1	50
17	11960.1	50
18	11961.1	50
19	11962.1	50
20	11963.1	50

Accessories

Coding Page 122 - 123

STL 1570/... /3,81-H-G horizontal

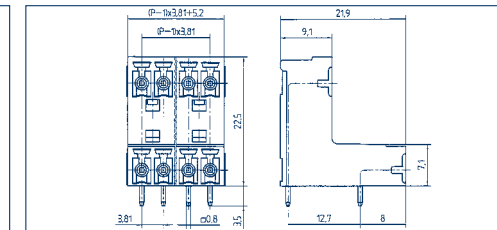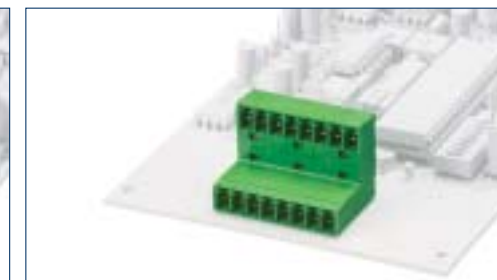

Connection principle

Dimensions

Spacing mm	3,81
Stripped length mm	-
PCB hole diameter mm	1,20

Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information

No. of poles	Cat.-No.	Qty.p.pck.
	● green	
	(Ral 6018)	

2	11964.1	50
3	11965.1	50
4	11966.1	50
5	11967.1	50
6	11968.1	50
7	11969.1	50
8	11970.1	50
9	11971.1	50
10	11972.1	50
11	11973.1	50
12	11974.1	50
13	11975.1	50
14	11976.1	50
15	11977.1	50
16	11978.1	50
17	11979.1	50
18	11980.1	50
19	11981.1	50
20	11982.1	50

Accessories


Coding Page 122 - 123



# CONTA-CON



## P.C. board plug-in connectors

Header




### Drawings

### STL 950/... /5,00-V vertical

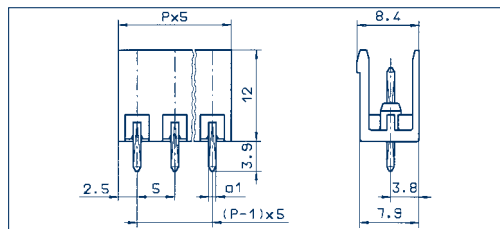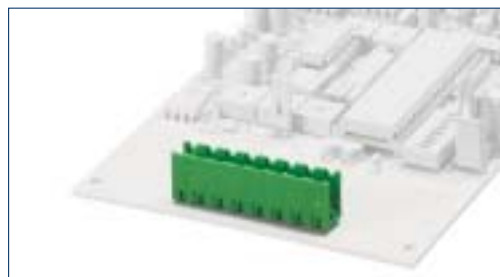

### STL 950/... /5,00-H horizontal

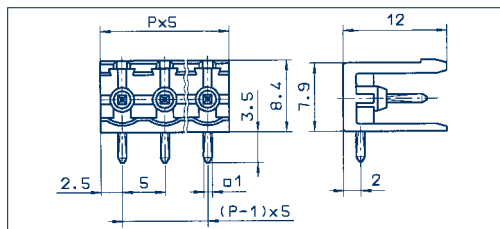

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11515.1	50
3	11516.1	50
4	11517.1	50
5	11518.1	50
6	11519.1	50
7	11520.1	50
8	11521.1	50
9	11522.1	50
10	11523.1	50
11	11524.1	50
12	11525.1	50
13	11526.1	50
14	11527.1	50
15	11528.1	50
16	11529.1	50
17	11530.1	50
18	11531.1	50
19	11532.1	50
20	11533.1	50
21	11534.1	50
22	11535.1	50
23	11536.1	50
24	11537.1	50

### Accessories

Coding Page 122 - 123



## P.C. board plug-in connectors

Header





### Drawings

### STL 950/... /5,00-V-G vertical

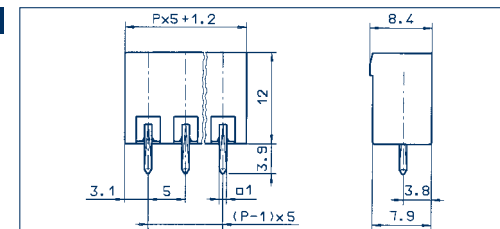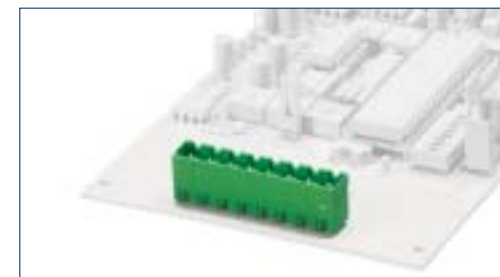

### STL 950/... /5,00-H-G horizontal

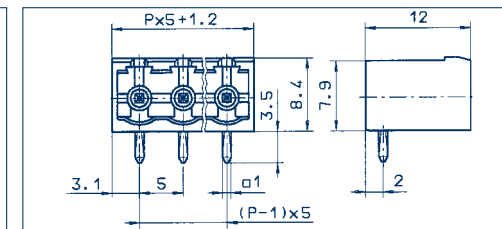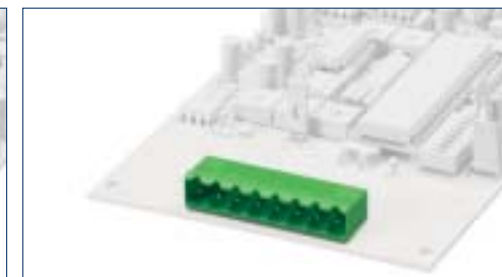

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11607.1	50
3	11608.1	50
4	11609.1	50
5	11610.1	50
6	11611.1	50
7	11612.1	50
8	11613.1	50
9	11614.1	50
10	11615.1	50
11	11616.1	50
12	11617.1	50
13	11618.1	50
14	11619.1	50
15	11620.1	50
16	11621.1	50
17	11622.1	50
18	11623.1	50
19	11624.1	50
20	11625.1	50
21	11626.1	50
22	11627.1	50
23	11628.1	50
24	11629.1	50


### Accessories

Coding Page 122 - 123

# CONTA-CON



## P.C. board plug-in connectors

Header





### Drawings

### STL 950/... /5,00-V-F vertical

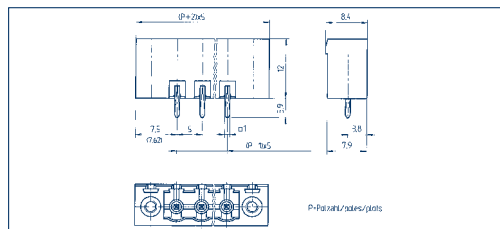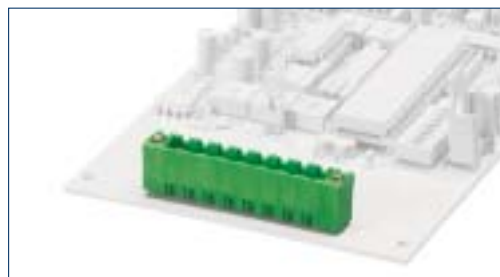

### STL 950/... /5,00-H-F horizontal

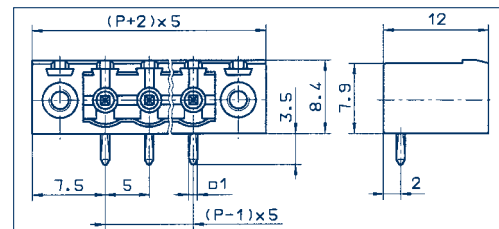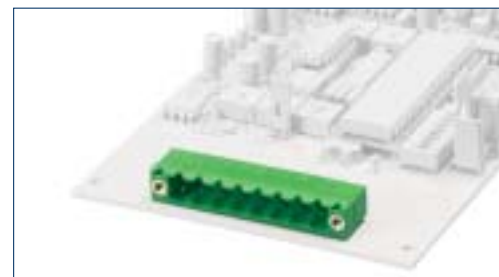

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	12201.1	50
3	12202.1	50
4	12203.1	50
5	12204.1	50
6	12205.1	50
7	12206.1	50
8	12207.1	50
9	12208.1	50
10	12209.1	50
11	13240.1	50
12	13241.1	50
13	13242.1	50
14	13243.1	50
15	13244.1	50
16	13245.1	50
17	13246.1	50
18	13247.1	50
19	13248.1	50
20	13249.1	50
21	13250.1	50
22	13251.1	50
23	13252.1	50
24	13253.1	50

#### Accessories

Coding Page 122 - 123



## P.C. board plug-in connectors

Header





### Drawings

### STL 975/... /5,00-V-G vertical

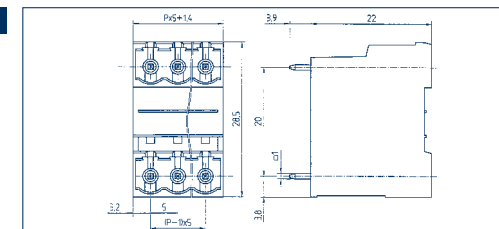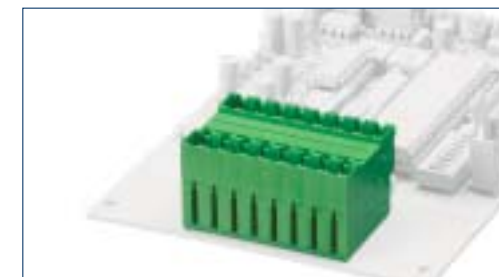

### STL 975/... /5,00-H-G horizontal

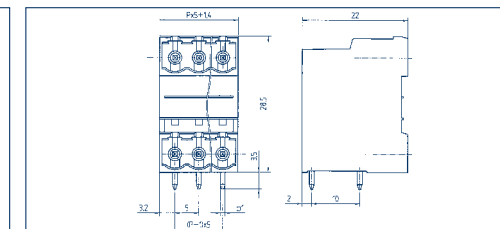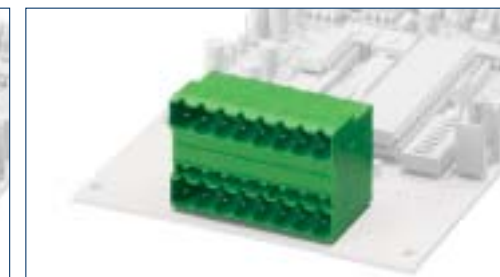

### Connection principle

#### Dimensions

Spacing mm	5,00
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	11799.1	50
3	11800.1	50
4	11801.1	50
5	11802.1	50
6	11803.1	50
7	11804.1	50
8	11805.1	50
9	11806.1	50
10	11807.1	50
11	11808.1	50
12	11809.1	50
13	11810.1	50
14	11811.1	50
15	11812.1	50
16	11813.1	50
17	11814.1	50
18	11815.1	50
19	11816.1	50
20	11817.1	50
21	11818.1	50
22	11819.1	50
23	11820.1	50
24	11821.1	50


#### Accessories

Coding Page 122 - 123

# CONTA-CON



## P.C. board plug-in connectors

Header





5,08 mm

### STL 950/... /5,08-V vertical

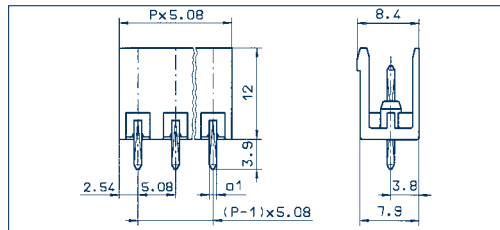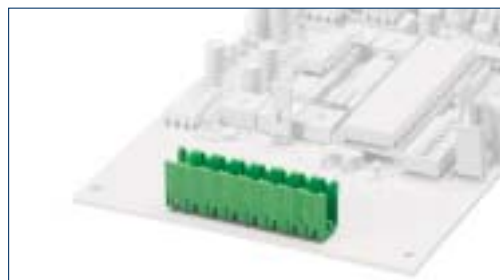

### STL 950/... /5,08-H horizontal

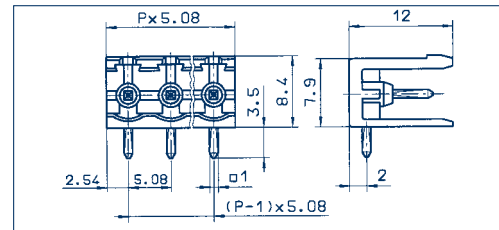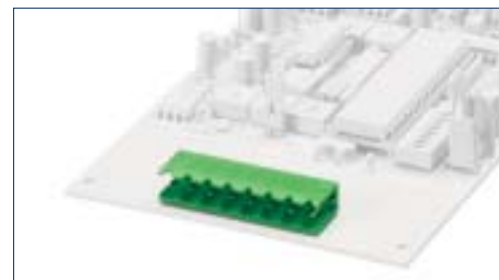

## Drawings

### Connection principle

#### Dimensions

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11538.1	50
3	11539.1	50
4	11540.1	50
5	11541.1	50
6	11542.1	50
7	11543.1	50
8	11544.1	50
9	11545.1	50
10	11546.1	50
11	11547.1	50
12	11548.1	50
13	11549.1	50
14	11550.1	50
15	11551.1	50
16	11552.1	50
17	11553.1	50
18	11554.1	50
19	11555.1	50
20	11556.1	50
21	11557.1	50
22	11558.1	50
23	11559.1	50
24	11560.1	50

#### Accessories

Coding Page 122 - 123


## P.C. board plug-in connectors

Header





5,08 mm

### STL 950/... /5,08-V-G vertical

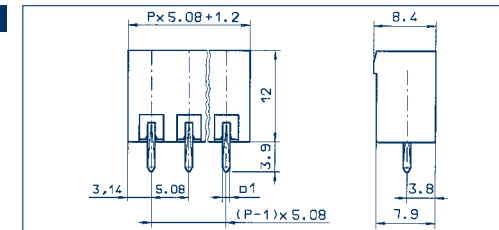

### STL 950/... /5,08-H-G horizontal

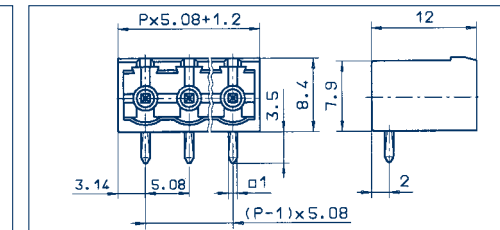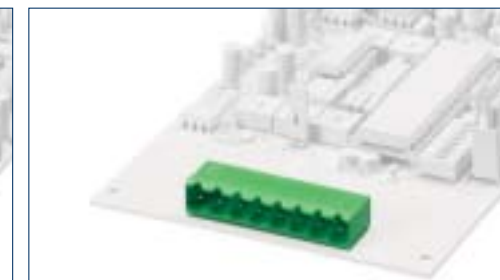

## Drawings

### Connection principle

#### Dimensions

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11630.1	50
3	11631.1	50
4	11632.1	50
5	11633.1	50
6	11634.1	50
7	11635.1	50
8	11636.1	50
9	11637.1	50
10	11638.1	50
11	11639.1	50
12	11640.1	50
13	11641.1	50
14	11642.1	50
15	11643.1	50
16	11644.1	50
17	11645.1	50
18	11646.1	50
19	11647.1	50
20	11648.1	50
21	11649.1	50
22	11650.1	50
23	11651.1	50
24	11652.1	50


#### Accessories

Coding Page 122 - 123



**P.C. board plug-in connectors**

Header



**Drawings**

**Connection principle**

**Dimensions**

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,40
<b>Cross sections</b>	
single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	


2	12210.1	50
3	12211.1	50
4	12212.1	50
5	12213.1	50
6	12214.1	50
7	12215.1	50
8	12216.1	50
9	12217.1	50
10	12218.1	50
11	13198.1	50
12	13199.1	50
13	13200.1	50
14	13201.1	50
15	13202.1	50
16	13203.1	50
17	13204.1	50
18	13205.1	50
19	13206.1	50
20	13207.1	50
21	13208.1	50
22	13209.1	50
23	13210.1	50
24	13211.1	50

**Accessories**


Coding Page 122 - 123

**CONTA-CON**

**STL 950/... /5,08-V-F vertical**

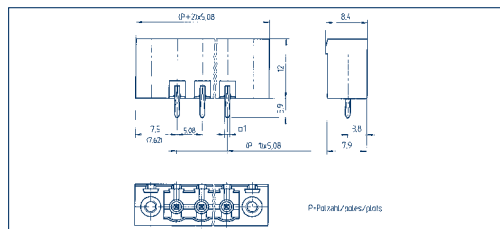

**STL 950/... /5,08-H-F horizontal**

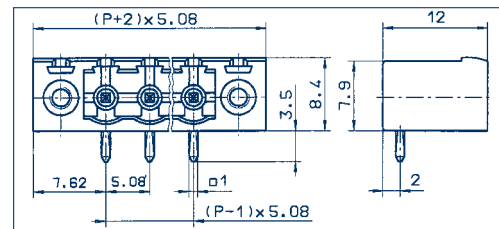

**Dimensions**

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,40
<b>Cross sections</b>	
single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	

2	11790.1	50
3	11791.1	50
4	11792.1	50
5	11793.1	50
6	11794.1	50
7	11795.1	50
8	11796.1	50
9	11797.1	50
10	11798.1	50
11	13268.1	50
12	13269.1	50
13	13270.1	50
14	13271.1	50
15	13272.1	50
16	13273.1	50
17	13274.1	50
18	13275.1	50
19	13276.1	50
20	13277.1	50
21	13278.1	50
22	13279.1	50
23	13280.1	50
24	13281.1	50

**Accessories**

Coding Page 122 - 123

**P.C. board plug-in connectors**

Header



**Drawings**

**Connection principle**

**Dimensions**

Spacing mm	5,08
Stripped length mm	-
PCB hole diameter mm	1,40
<b>Cross sections</b>	
single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	4,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	


2	11845.1	50
3	11846.1	50
4	11847.1	50
5	11848.1	50
6	11849.1	50
7	11850.1	50
8	11851.1	50
9	11852.1	50
10	11853.1	50
11	11854.1	50
12	11855.1	50
13	11856.1	50
14	11857.1	50
15	11858.1	50
16	11859.1	50
17	11860.1	50
18	11861.1	50
19	11862.1	50
20	11863.1	50
21	11864.1	50
22	11865.1	50
23	11866.1	50
24	11867.1	50

**Accessories**

Coding Page 122 - 123

**P.C. board plug-in connectors**

Header



**Drawings**

**Connection principle**

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	



2	11759.1	50
3	11760.1	50
4	11761.1	50
5	11762.1	50
6	11763.1	50
7	11764.1	50
8	11765.1	50
9	11766.1	50
10	11767.1	50
11	11768.1	50
12	11769.1	50
13	12738.1	50
14	12739.1	50
15	12740.1	50
16	12741.1	50
17	12742.1	50
18	12743.1	50
19	12744.1	50
20	12745.1	50
21	12746.1	50
22	12747.1	50
23	12748.1	50
24	12749.1	50

**Accessories**


Coding	Page 122 - 123
--------	----------------

**CONTA-CON**

**STL 970/... /5,08-V vertical**

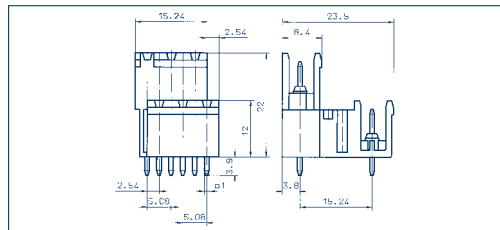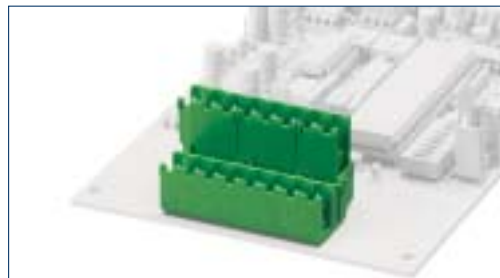

**STL 970/... /5,08-H horizontal**

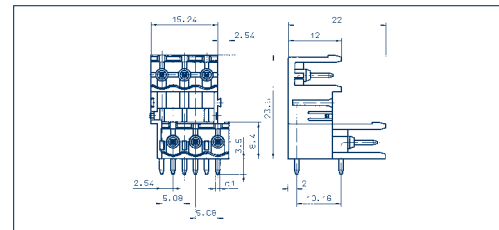

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	


2	11770.1	50
3	11771.1	50
4	11772.1	50
5	11773.1	50
6	11774.1	50
7	11775.1	50
8	11776.1	50
9	11777.1	50
10	11778.1	50
11	11779.1	50
12	11780.1	50
13	12750.1	50
14	12750.1	50
15	12750.1	50
16	12750.1	50
17	12750.1	50
18	12750.1	50
19	12750.1	50
20	12750.1	50
21	12750.1	50
22	12750.1	50
23	12750.1	50
24	12750.1	50

**Accessories**

Coding	Page 122 - 123
--------	----------------

**P.C. board plug-in connectors**

Header



**Drawings**

**Connection principle**

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	

2	13429.1	50
3	13430.1	50
4	13431.1	50
5	13432.1	50
6	13433.1	50
7	13434.1	50
8	13435.1	50
9	13436.1	50
10	13437.1	50
11	13438.1	50
12	13439.1	50


**Accessories**

Coding	Page 122 - 123
--------	----------------

**STL 970/... /5,08-V-G vertical**

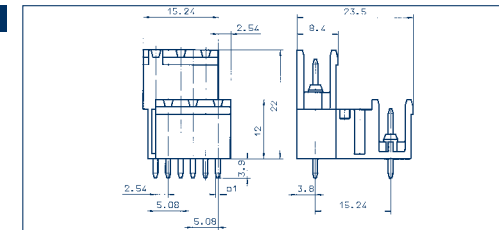

**STL 970/... /5,08-H-G horizontal**

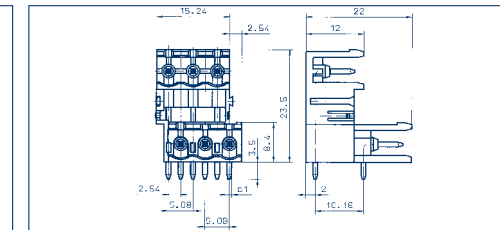

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	

2	13440.1	50
3	13441.1	50
4	13442.1	50
5	13443.1	50
6	13444.1	50
7	13445.1	50
8	13446.1	50
9	13447.1	50
10	13448.1	50
11	13449.1	50
12	13450.1	50

**Accessories**

Coding	Page 122 - 123
--------	----------------

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	


2	13440.1	50
3	13441.1	50
4	13442.1	50
5	13443.1	50
6	13444.1	50
7	13445.1	50
8	13446.1	50
9	13447.1	50
10	13448.1	50
11	13449.1	50
12	13450.1	50

**Accessories**

Coding	Page 122 - 123
--------	----------------

**P.C. board plug-in connectors**

Header



**Drawings**

**Connection principle**

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	13451.1	50
3	13452.1	50
4	13453.1	50
5	13454.1	50
6	13455.1	50
7	13456.1	50
8	13457.1	50
9	13458.1	50
10	13459.1	50
11	13460.1	50
12	13461.1	50

**Accessories**


Coding Page 122 - 123

**CONTA-CON**

**STL 970/... /5,08-V-F vertical**

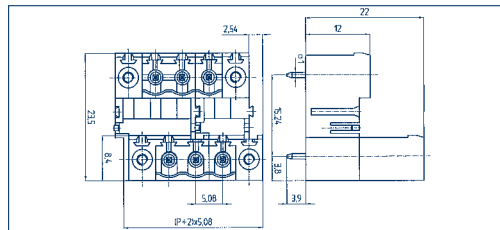

**STL 970/... /5,08-H-F horizontal**

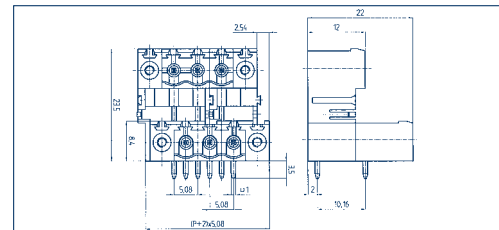

**Dimensions**

Spacing mm	5,08
Stripped length mm	—
PCB hole diameter mm	1,40

**Cross sections**

single wire (solid) mm <sup>2</sup>	—
stranded wire (flexible) mm <sup>2</sup>	—
stranded wire (with ferrules) mm <sup>2</sup>	—

**Output information**

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	—	—
Rating impulse voltage	—	4,00 kV
Rated torque/Screw size	—	—
Dirt level	—	3

**Materials**

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	—
Contact pin	Cu
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	—

**Order information**


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	13462.1	50
3	13463.1	50
4	13464.1	50
5	13465.1	50
6	13466.1	50
7	13467.1	50
8	13468.1	50
9	13469.1	50
10	13470.1	50
11	13471.1	50
12	13472.1	50

Coding Page 122 - 123

# CONTA-CON


## P.C. board plug-in connectors

Header





### Drawings

#### STL 960/... /7,62-V vertical

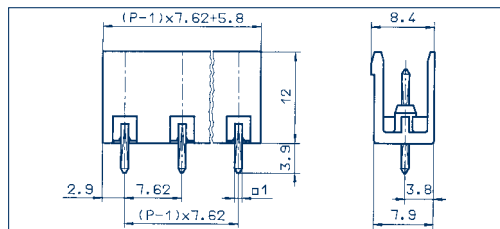

#### STL 960/... /7,62-H horizontal

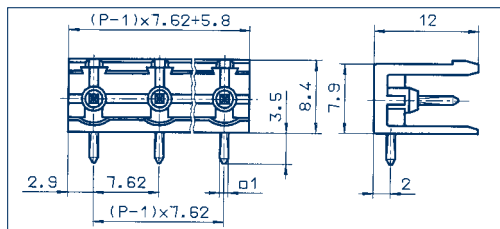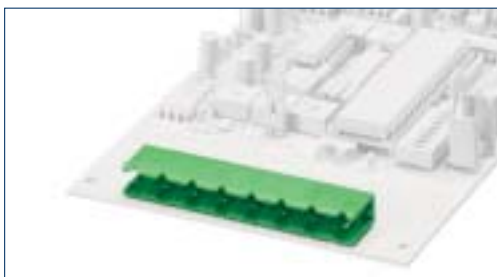

### Connection principle

#### Dimensions

Spacing mm	7,62
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	400 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	6,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information


No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11699.1	50
3	11700.1	50
4	11701.1	50
5	11702.1	50
6	11703.1	50
7	11704.1	50
8	11705.1	50
9	11706.1	50
10	11707.1	50
11	11708.1	50
12	11709.1	50
13	11710.1	50
14	11711.1	50
15	11712.1	50
16	11713.1	50

### Accessories

Coding Page 122 - 123


## P.C. board plug-in connectors

Header




### Drawings

#### STL 960/... /7,62-V-G vertical

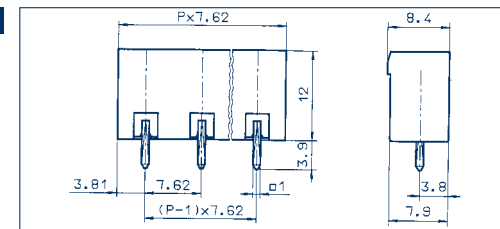

#### STL 960/... /7,62-H-G horizontal

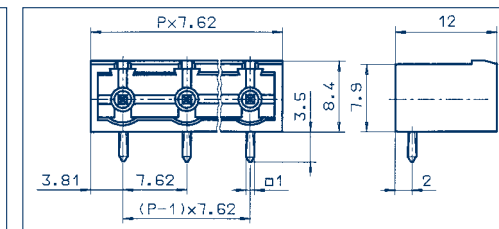

### Connection principle

#### Dimensions

Spacing mm	7,62
Stripped length mm	-
PCB hole diameter mm	1,40

#### Cross sections

single wire (solid) mm <sup>2</sup>	-
stranded wire (flexible) mm <sup>2</sup>	-
stranded wire (with ferrules) mm <sup>2</sup>	-

#### Output information

Rated voltage V	300 V	400 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	-	-
Rating impulse voltage	-	6,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	green	
	(Ral 6018)	
2	11729.1	50
3	11730.1	50
4	11731.1	50
5	11732.1	50
6	11733.1	50
7	11734.1	50
8	11735.1	50
9	11736.1	50
10	11737.1	50
11	11738.1	50
12	11739.1	50
13	11740.1	50
14	11741.1	50
15	11742.1	50
16	11743.1	50

### Accessories

Coding Page 122 - 123