

## Marking

Strip height 2,8 mm, 3,3 mm or 3,8 mm

All printed circuit board terminals and printed circuit board plug-in connectors are shipped without any pole designation and/or lettering.

Customized lettering of all **CONTA-CON** connectors available at extra charge.

Imprinted or neutral adhesive **marking cards BK** are also available.

Such adhesive strips can be attached to any of the printed board or plug-in connectors which do not have a guide groove (except see below). Existing strip heights: 2.8 mm, 3.3 mm or 3.8 mm. Depending on their version, 12 or 14 marking strips with 10 or 12 marking tags each are contained on one **marking card BK**.

These cards are available for the following spacings of the **CONTA-CON** printed circuit board connectors: 2,50; 2,54; 3,50; 3,81; 5,00; 5,08; 7,50; 7,62. Marking cards with a horizontal standard continuous marking from 0 thru 40 are available for these spacings.

Non printed 10 pole cards with spacing marks are available for individual markings which can be done by hand using marker **BS-1**. Individual machine manufactured marking cards are available upon request.

### Exception:

As regards the printed board connectors **PK 2,5**; **PKDL 2,5** and **PKDR 2,5** the insulating enclosure is equipped with a groove to snap a marking label. Please see our catalogue **CONTA-CONNECT** for a detailed product description of this quick marking system **SB**.




Ex. Marking cards **BK**



Ex. Quick marking system **SB**

### Marking Card BK

### BK 2,50/2,8

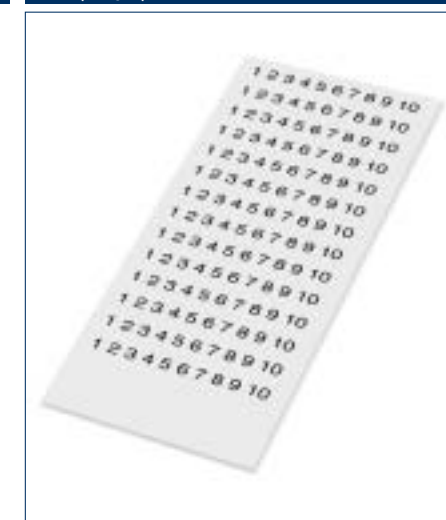

### BK 2,54/2,8



#### Component parts

Marking Card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 14 marking strips for 140 connectors marked with:  
 0-9  
 1-10  
 11-20  
 21-30  
 31-40

Marking pen **BS-1**

#### Properties

Tabs per marking card 140 pcs.  
 Spacing/Tab height 2,50 mm/2,8 mm  
 Material/Color Polyester/white  
 Temperature range (°C) 40°C bis +120°C  
 Wipe-proof after printing DIN 30 646; VDE 0611: 1977-11

#### Type

**BK 2,8** 3161.0 Qty.p.pck. 10 non printed

**BK 2,50/2,8 FW** 0-9 2979.0 10  
**BK 2,50/2,8 FW** 1-10 2980.0 10  
**BK 2,50/2,8 FW** 11-20 2981.0 10  
**BK 2,50/2,8 FW** 21-30 2982.0 10  
**BK 2,50/2,8 FW** 31-40 2983.0 10

**BS-1** 2034.0 10

#### Type


**BK 2,8** 3161.0 Qty.p.pck. 10 non printed

**BK 2,54/2,8 FW** 0-9 2984.0 10  
**BK 2,54/2,8 FW** 1-10 2985.0 10  
**BK 2,54/2,8 FW** 11-20 2986.0 10  
**BK 2,54/2,8 FW** 21-30 2987.0 10  
**BK 2,54/2,8 FW** 31-40 2988.0 10


**BS-1** 2034.0 10

### Marking Card BK

### BK 3,50/2,8

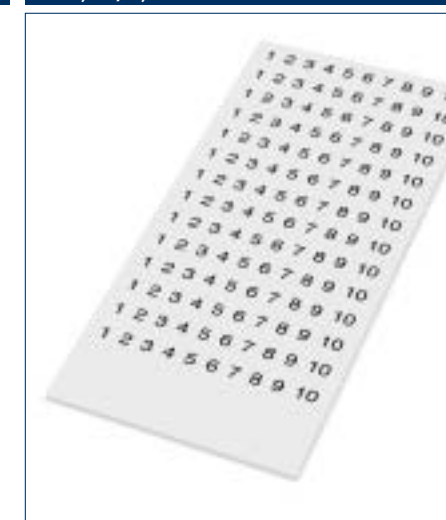

### BK 3,81/2,8

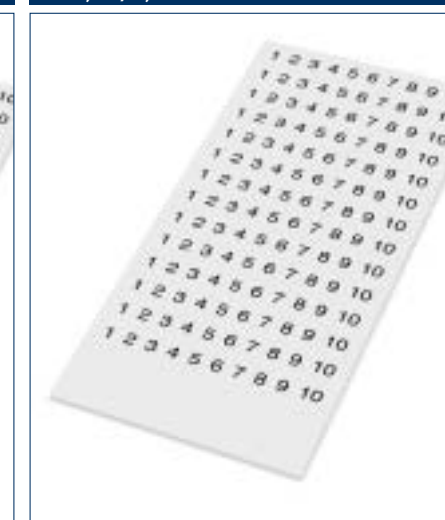

#### Component parts

Marking card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 14 marking strips for 140/120 connectors marked with:  
 0-9  
 1-10  
 11-20  
 21-30  
 31-40

Marking pen **BS-1**

#### Properties

Tabs per marking card 140 pcs.  
 Spacing/Tab height 3,50 mm/2,8 mm  
 Material/Color Polyester/white  
 Temperature range (°C) -40°C bis +120°C  
 Wipe-proof after printing DIN 30 646; VDE 0611: 1977-11

#### Type

**BK 2,8** 3161.0 Qty.p.pck. 10 non printed

**BK 3,50/2,8 FW** 0-9 3015.0 10  
**BK 3,50/2,8 FW** 1-10 3016.0 10  
**BK 3,50/2,8 FW** 11-20 3017.0 10  
**BK 3,50/2,8 FW** 21-30 3018.0 10  
**BK 3,50/2,8 FW** 31-40 3019.0 10

**BS-1** 2034.0 10

#### Type


**BK 2,8** 3161.0 Qty.p.pck. 10 non printed

**BK 3,81/2,8 FW** 0-9 3032.0 10  
**BK 3,81/2,8 FW** 1-10 3033.0 10  
**BK 3,81/2,8 FW** 11-20 3034.0 10  
**BK 3,81/2,8 FW** 21-30 3035.0 10  
**BK 3,81/2,8 FW** 31-40 3036.0 10


**BS-1** 2034.0 10

**Marking Card BK**

**BK 5,08/2,8**

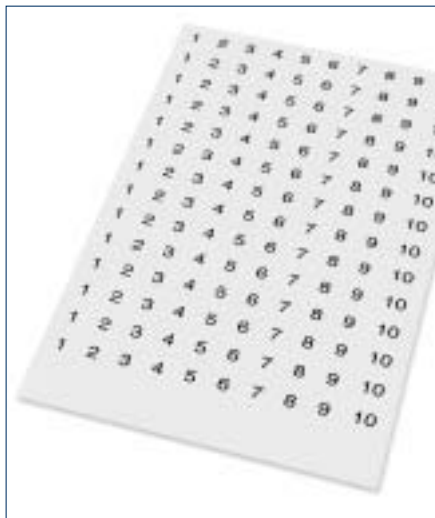

**BK 5,00/3,8**

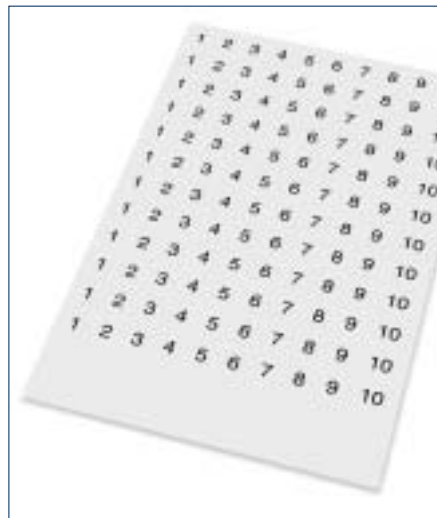

**Component parts**

Marking Card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 14/12 marking strips for 140/120 connectors marked with:

0-9	<b>BK 5,08/2,8 FW</b> 0-9	3136.0	10
1-10	<b>BK 5,08/2,8 FW</b> 1-10	3137.0	10
11-20	<b>BK 5,08/2,8 FW</b> 11-20	3138.0	10
21-30	<b>BK 5,08/2,8 FW</b> 21-30	3139.0	10
31-40	<b>BK 5,08/2,8 FW</b> 31-40	3140.0	10

Marking pen **BS-1** 2034.0 10

**Properties**

Tabs per marking card	140 pcs.
Spacing/Tab height	5,08 mm/2,8 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Type** **Cat.-No.** Qty.p.pck.

**BK 2,8** 3161.0 10  
non printed

**Type** **Cat.-No.** Qty.p.pck.

**BK 3,8** 3162.0 10  
non printed

0-9	<b>BK 5,00/3,8 FW</b> 0-9	3141.0	10
1-10	<b>BK 5,00/3,8 FW</b> 1-10	3142.0	10
11-20	<b>BK 5,00/3,8 FW</b> 11-20	3143.0	10
21-30	<b>BK 5,00/3,8 FW</b> 21-30	3144.0	10
31-40	<b>BK 5,00/3,8 FW</b> 31-40	3145.0	10


Marking pen **BS-1** 2034.0 10

**Properties**

Tabs per marking card	120 pcs.
Spacing/Tab height	5,00 mm/3,8 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Marking Cards BK**

**BK 5,08/3,8**

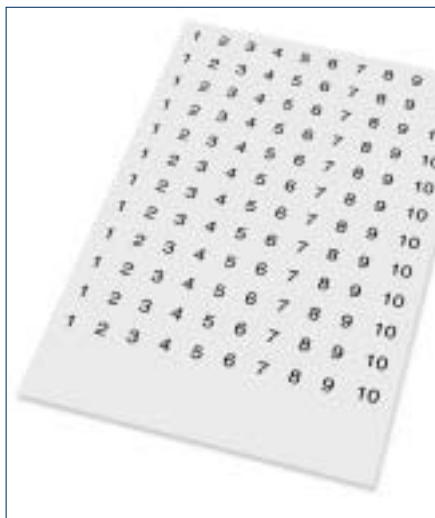

**Component parts**

Marking card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 12 marking strips for 120 connectors marked with:

0-9	<b>BK 5,08/3,8 FW</b> 0-9	3146.0	10
1-10	<b>BK 5,08/3,8 FW</b> 1-10	3147.0	10
11-20	<b>BK 5,08/3,8 FW</b> 11-20	3148.0	10
21-30	<b>BK 5,08/3,8 FW</b> 21-30	3149.0	10
31-40	<b>BK 5,08/3,8 FW</b> 31-40	3150.0	10

Marking pen **BS-1** 2034.0 10

**Properties**


Tabs per marking card	120 pcs.
Spacing/Tab height	5,08 mm/3,8 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Type** **Cat.-No.** Qty.p.pck.


**BK 3,8** 3162.0 10  
non printed

**Marking Card BK**

**BK 7,50/3,8**

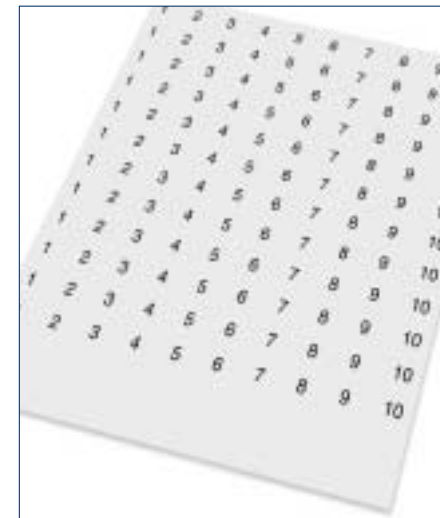

**BK 7,62/3,80**

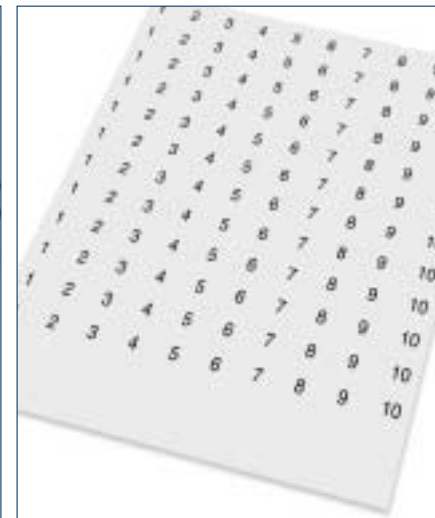

**Component parts**

Marking Card, non printed, free spacing, including 12 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 12 marking strips for 120 connectors marked with:

0-9	<b>BK 7,50/3,8 FW</b> 0-9	3151.0	10
1-10	<b>BK 7,50/3,8 FW</b> 1-10	3152.0	10
11-20	<b>BK 7,50/3,8 FW</b> 11-20	3153.0	10
21-30	<b>BK 7,50/3,8 FW</b> 21-30	3154.0	10
31-40	<b>BK 7,50/3,8 FW</b> 31-40	3155.0	10

Marking pen **BS-1** 2034.0 10

**Properties**

Tabs per marking card	120 pcs.
Spacing/Tab height	7,50 mm/3,8 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Type** **Cat.-No.** Qty.p.pck.

**BK 3,8** 3162.0 10  
non printed

**Type** **Cat.-No.** Qty.p.pck.

**BK 3,8** 3162.0 10  
non printed

0-9	<b>BK 7,50/3,8 FW</b> 0-9	3151.0	10
1-10	<b>BK 7,50/3,8 FW</b> 1-10	3152.0	10
11-20	<b>BK 7,50/3,8 FW</b> 11-20	3153.0	10
21-30	<b>BK 7,50/3,8 FW</b> 21-30	3154.0	10
31-40	<b>BK 7,50/3,8 FW</b> 31-40	3155.0	10

Marking pen **BS-1** 2034.0 10

0-9	<b>BK 7,62/3,8 FW</b> 0-9	3156.0	10
1-10	<b>BK 7,62/3,8 FW</b> 1-10	3157.0	10
11-20	<b>BK 7,62/3,8 FW</b> 11-20	3158.0	10
21-30	<b>BK 7,62/3,8 FW</b> 21-30	3159.0	10
31-40	<b>BK 7,62/3,8 FW</b> 31-40	3160.0	10


Marking pen **BS-1** 2034.0 10

**Properties**


Tabs per marking card	120 pcs.
Spacing/Tab height	7,62 mm/3,8 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Marking Card BK**

**BK 1-12/5,08/3,3**

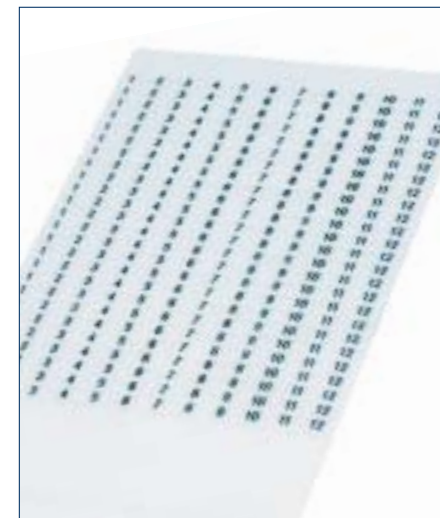

**BK 13-24/5,08/3,3**

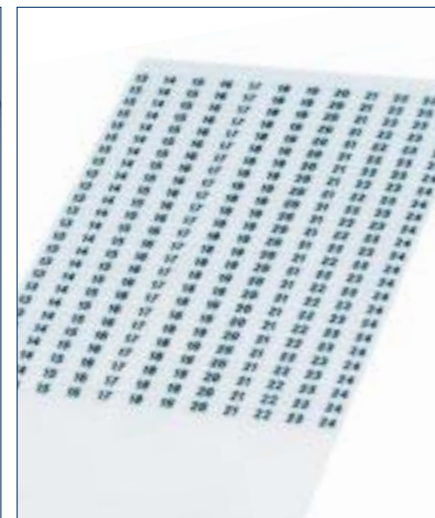

**Component parts**

Marking card, non printed, free spacing, including 12 prepunched marking strips. Card, printed; continuous, horizontal, ten-digit marking strip, 25 marking strips for 300 connectors.

Card, printed; continuous, horizontal, ten-digit marking strip, 25 marking strips for 300 connectors.

0-9	<b>BK 1-12/5,08</b> 0-9	2960.0	10
1-10	<b>BK 1-12/5,08</b> 1-10	2961.0	10
11-20	<b>BK 1-12/5,08</b> 11-20	2962.0	10
21-30	<b>BK 1-12/5,08</b> 21-30	2963.0	10
31-40	<b>BK 1-12/5,08</b> 31-40	2964.0	10

Marking pen **BS-1** 2034.0 10

**Properties**

Tabs per marking card	300 pcs.
Spacing/Tab height	5,08 mm/3,3 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11

**Type** **Cat.-No.** Qty.p.pck.

**BK 1-12/5,08** 2960.0 10

**Type** **Cat.-No.** Qty.p.pck.

**BK 13-24/5,08** 2961.0 10

0-9	<b>BK 1-12/5,08</b> 0-9	2960.0	10
1-10	<b>BK 1-12/5,08</b> 1-10	2961.0	10
11-20	<b>BK 1-12/5,08</b> 11-20	2962.0	10
21-30	<b>BK 1-12/5,08</b> 21-30	2963.0	10
31-40	<b>BK 1-12/5,08</b> 31-40	2964.0	10

Marking pen **BS-1** 2034.0 10

0-9	<b>BK 13-24/5,08</b> 0-9	2961.0	10
1-10	<b>BK 13-24/5,08</b> 1-10	2962.0	10
11-20	<b>BK 13-24/5,08</b> 11-20	2963.0	10
21-30	<b>BK 13-24/5,08</b> 21-30	2964.0	10
31-40	<b>BK 13-24/5,08</b> 31-40	2965.0	10

Marking pen **BS-1** 2034.0 10

**Properties**

Tabs per marking card	300 pcs.
Spacing/Tab height	5,08 mm/3,3 mm
Material/Color	Polyester/white
Temperature range (°C)	-40°C bis +120°C
Wipe-proof after printing	DIN 30 646; VDE 0611: 1977-11