


P.C. board plug-in connectors

Connector



5,08 mm

PBT 1200/... /5,08

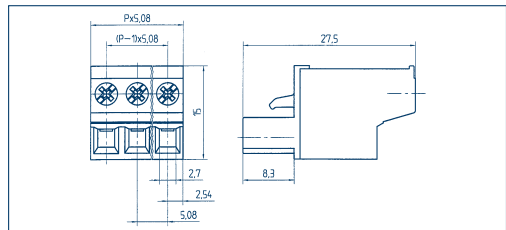

Drawings

Connection principle

Dimensions

Spacing mm
Stripped length mm
PCB hole diameter mm

Cross sections

single wire (solid) mm²
stranded wire (flexible) mm²
stranded wire (with ferrules) mm²

Output information

Rated voltage V
Rated current A
Cross section max. AWG/mm²
Rating impulse voltage
Rated torque/Screw size
Dirt level

Materials

Insulating material/Flammability class
Temperature Range
Clamping part
Clamping cage/Eccentric
Contact pin
Cage tension spring
Wire protection
Soldering lug
Contact Spring

Order information

Standard colour(s)
(further colours on request, see page 5)

Eccentric-top

Spacing mm	5,08
Stripped length mm	10,00
PCB hole diameter mm	—
single wire (solid) mm ²	2,50
stranded wire (flexible) mm ²	2,50
stranded wire (with ferrules) mm ²	2,50
Rated voltage V	300 V 250 V
Rated current A	15 A 12 A (T60)
Cross section max. AWG/mm ²	22-12 2,50
Rating impulse voltage	— 4,00 kV
Rated torque/Screw size	— 0,50 Nm/M3
Dirt level	— 3
Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	—
Clamping cage/Eccentric	Fe/Fe
Contact pin	—
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	CuSn

No. of poles	Cat.-No.	Qty.p.pck.
--------------	----------	------------

	●	
	green	
	(Ral 6018)	
2	11354.1	50
3	11355.1	50
4	11356.1	50
5	11357.1	50
6	11358.1	50
7	11359.1	50
8	11360.1	50
9	11361.1	50
10	11362.1	50
11	11363.1	50
12	11364.1	50
13	11365.1	50
14	11366.1	50
15	11367.1	50
16	11368.1	50
17	11369.1	50
18	11370.1	50
19	11371.1	50
20	11372.1	50
21	11373.1	50
22	11374.1	50
23	11375.1	50
24	11376.1	50

Accessories

Marking Page 124 - 127
Coding Page 122 - 123