




CONTA-CON

P.C. board plug-in connectors

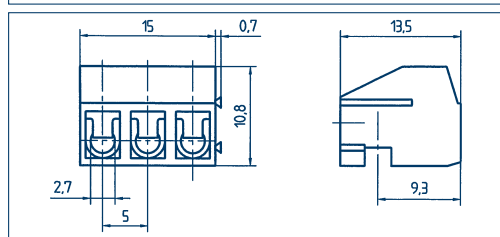

PKB 130/... /5,00

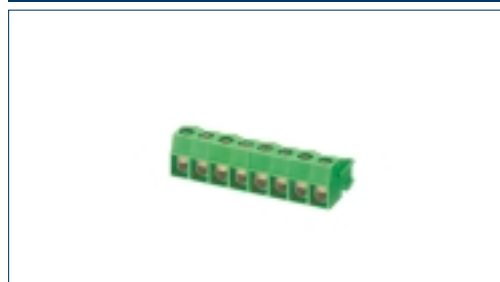

Drawings

Connection principle

Dimensions

Spacing mm	5,00
Stripped length mm	6,00
PCB hole diameter mm	

Cross sections

single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Output information

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T60)
Cross section max. AWG/mm ²	22-14	1,50
Rating impulse voltage	–	4,00 kV
Rated torque/Screw size	–	0,40 Nm/M2,6
Dirt level	–	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	–
Contact pin	–
Cage tension spring	–
Wire protection	–
Soldering lug	–
Contact Spring	CuBe

Order information



No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	● dark grey (Ral 7016)

No. of poles	Cat.-No.	Qty.p.pck.
2	11169.1	50
3	11170.1	50
4	11171.1	50
5	11172.1	50
6	11173.1	50
7	11174.1	50
8	11175.1	50
9	11176.1	50
10	11177.1	50
11	11178.1	50
12	11179.1	50

Accessories

Marking Page 124 - 127

PKB 130/... /5,00-BL

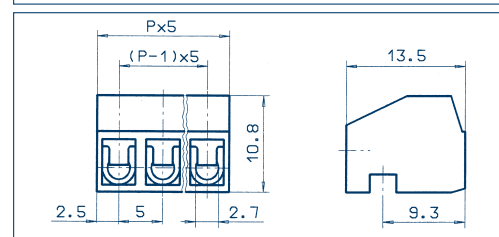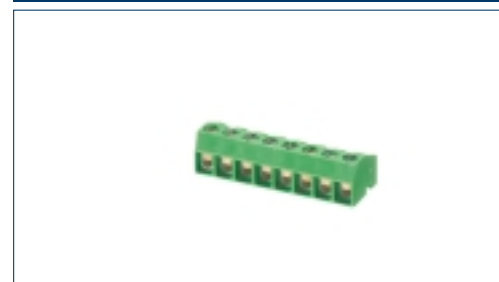

Wire-protection

Spacing mm	5,00
Stripped length mm	6,00
PCB hole diameter mm	
single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T60)
Cross section max. AWG/mm ²	22-14	1,50
Rating impulse voltage	–	4,00 kV
Rated torque/Screw size	–	0,40 Nm/M2,6
Dirt level	–	3


Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	–
Contact pin	–
Cage tension spring	–
Wire protection	–
Soldering lug	–
Contact Spring	CuBe

No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	● dark grey (Ral 7016)



No. of poles	Cat.-No.	Qty.p.pck.
2	11185.1	50
3	11186.1	50
4	11187.1	50
5	11188.1	50
6	11189.1	50
7	11190.1	50
8	11191.1	50
9	11192.1	50
10	11193.1	50
11	11194.1	50
12	11195.1	50
13	11196.1	50
14	11197.1	50
15	11198.1	50
16	11199.1	50

Marking Page 124 - 127

P.C. board plug-in connectors



PKB 130/... /5,08-BL

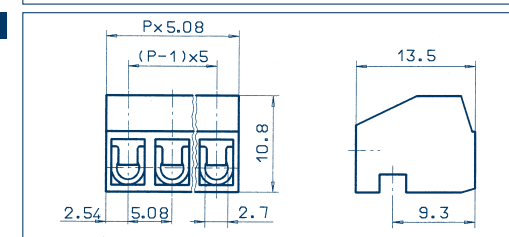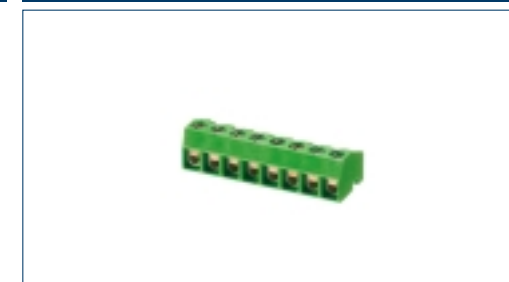

Drawings

Connection principle

Dimensions

Spacing mm	5,08
Stripped length mm	6,00
PCB hole diameter mm	–

Cross sections

single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Output information

Rated voltage V	300 V	250 V
Rated current A	10 A	10 A (T60)
Cross section max. AWG/mm ²	22-14	1,50
Rating impulse voltage	–	4,00 kV
Rated torque/Screw size	–	0,40 Nm/M2,6
Dirt level	–	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	–
Contact pin	–
Cage tension spring	–
Wire protection	–
Soldering lug	–
Contact Spring	CuBe

Order information



No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	● dark grey (Ral 7016)

No. of poles	Cat.-No.	Qty.p.pck.
2	13628.1	50
3	13629.1	50
4	13630.1	50
5	13631.1	50
6	13632.1	50
7	13633.1	50
8	13634.1	50
9	13635.1	50
10	13636.1	50
11	13637.1	50
12	13638.1	50
13	13639.1	50
14	13640.1	50
15	13641.1	50
16	13642.1	50

Accessories

Marking Page 124 - 127

PKB 130/... /10,00

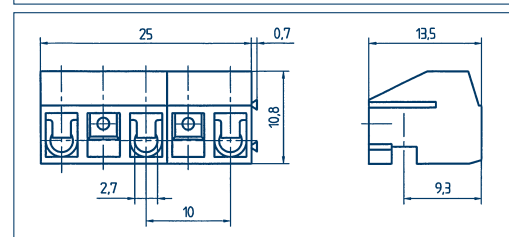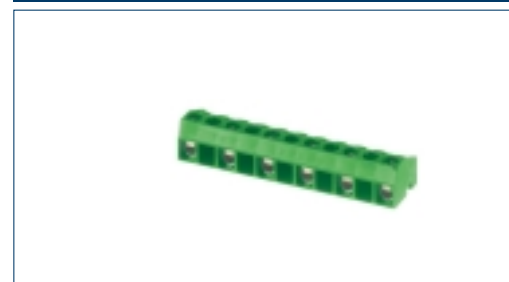

Wire-protection

Spacing mm	10,00
Stripped length mm	6,00
PCB hole diameter mm	–
single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Rated voltage V	300 V	630 V
Rated current A	10 A	10 A (T60)
Cross section max. AWG/mm ²	22-14	1,50
Rating impulse voltage	–	8,00 kV
Rated torque/Screw size	–	0,40 Nm/M2,6
Dirt level	–	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	–
Contact pin	–
Cage tension spring	–
Wire protection	–
Soldering lug	–
Contact Spring	CuBe


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	● dark grey (Ral 7016)

No. of poles	Cat.-No.	Qty.p.pck.
2	11180.1	50
3	11181.1	50
4	11182.1	50
5	11183.1	50
6	11184.1	50

Marking Page 124 - 127



CONTA-CON

P.C. board plug-in connectors





Drawings

PKB 130/... /10,00-BL

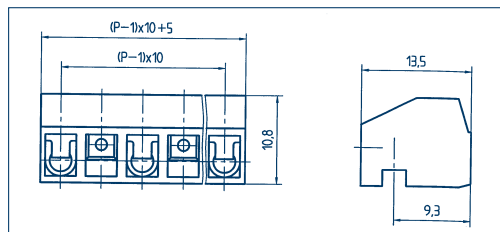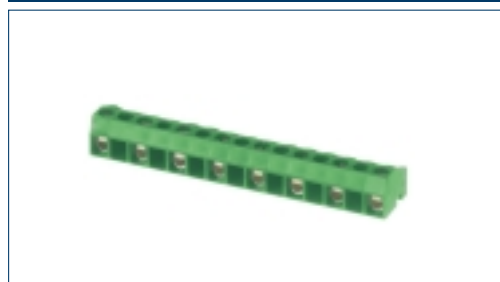

PKB 130/... /10,16-BL

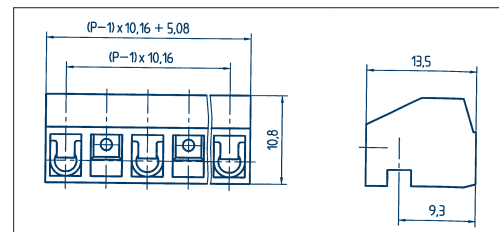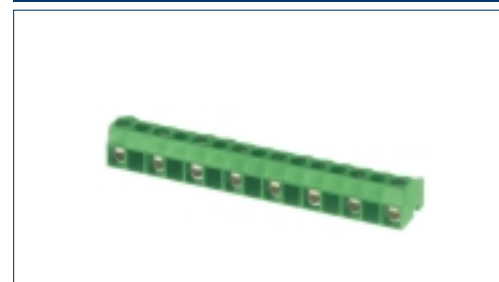

Connection principle

Dimensions

Spacing mm	10,00
Stripped length mm	6,00
PCB hole diameter mm	-

Cross sections

single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Output information

Rated voltage V	300 V
Rated current A	10 A
Cross section max. AWG/mm ²	22-14
Rating impulse voltage	-
Rated torque/Screw size	-
Dirt level	-

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuBe

Order information

Standard colour(s)	● green ● dark grey
(further colours on request, see page 5)	(Ral 6018) (Ral 7016)

	2	11200.1	11200.4	50
	3	11201.1	11201.4	50
	4	11202.1	11202.4	50
	5	11203.1	11203.4	50
	6	11204.1	11204.4	50
	7	11205.1	11205.4	50
	8	11206.1	11206.4	50

Wire-protection

Spacing mm	10,00
Stripped length mm	6,00
PCB hole diameter mm	-
single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Rated voltage V	300 V
Rated current A	10 A (T60)
Cross section max. AWG/mm ²	1,50
Rating impulse voltage	8,00 kV
Rated torque/Screw size	0,40 Nm/M2,6
Dirt level	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuBe

No. of poles	● green ● dark grey
	(Ral 6018) (Ral 7016)

	2	11200.1	11200.4	50
	3	11201.1	11201.4	50
	4	11202.1	11202.4	50
	5	11203.1	11203.4	50
	6	11204.1	11204.4	50
	7	11205.1	11205.4	50
	8	11206.1	11206.4	50

Wire-protection

Spacing mm	10,16
Stripped length mm	6,00
PCB hole diameter mm	-
single wire (solid) mm ²	1,50
stranded wire (flexible) mm ²	1,00
stranded wire (with ferrules) mm ²	1,00

Rated voltage V	300 V
Rated current A	10 A (T60)
Cross section max. AWG/mm ²	1,50
Rating impulse voltage	8,00 kV
Rated torque/Screw size	0,40 Nm/M2,6
Dirt level	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuBe

No. of poles	● green ● dark grey
	(Ral 6018) (Ral 7016)

	2	13643.1	13643.4	50
	3	13644.1	13644.4	50
	4	13645.1	13645.4	50
	5	13646.1	13646.4	50
	6	13647.1	13647.4	50
	7	13648.1	13648.4	50
	8	13649.1	13649.4	50

Accessories

Marking	Page 124 - 127
---------	----------------

Accessories

Marking	Page 124 - 127
---------	----------------